Quick Start Guide

Ai Power A1D65

Get started

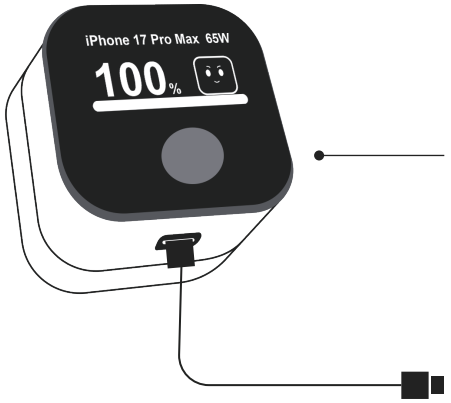

Touch button
Tap to awke and flip pages.

Plug in a certified USB-C cable to charge your device.

Input: AC 110-240 V~50/60 Hz 1.5 A
Output: 65W max
5 V=3 A 9 V=3 A 15 V=3 A 20 V=3.25 A, 65 W max
PPS: 5-21 V=3 A, 63 W max
AVS: 9-20 V=3.25 A, 65 W max

Animations overview

The animations are for reference only.
Please refer to the actual display page.

Starts when powered.

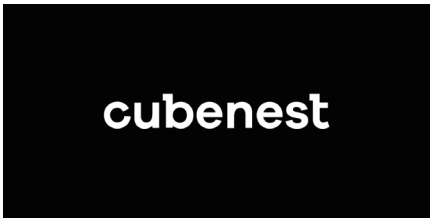

Awake mode
Tap to awake.

Sleep mode
When the device is disconnected, it goes into sleep mode.

Standby mode (screen off)
The screen will automatically turn off after one minute of inactivity.



Screen rotation

Press and hold for 2 seconds to rotate the screen.

Charging complete

Appears when the device is disconnected.

Charge monitoring

When a supported Apple device is detected, The screen will automatically show the charging interface.

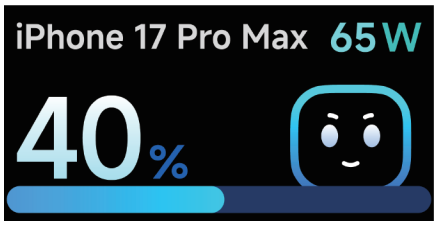

The recognition support list for Apple devices:
iPhone 18 / 17 / 16 /15 /14 /13 / 12
iPad Pro-11 inch (M5) 2025
iPad Pro-13 inch (M4) 2025
iPad Air-11 inch (M3) 2025
iPad Pro-11 inch (M4) 2024
iPad Air-13 inch (M2) 2024
iPad Air-11 inch (M2) 2024
iPad Pro-11inch (M2) 2022
iPad Air-10.9 inch (M1) 2022
iPad-10.9 inch 2022
iPad Pro-11inch (M1) 2021
iPad-10.2 inch 2021
iPad mini-8.3 inch 2021
iPad Pro-12.9 inch 2020
iPad Pro-11 inch 2020
iPad Air-10.9 inch 2020
MacBook Air-13 inch (M4) 2025
MacBook Air-15 inch (M3) 2024
MacBook Air-13 inch (M3) 2024
MacBook Pro-16 inch (M3) 2023
MacBook Pro-14 inch (M2) 2023
MacBook Pro-16 inch (M2) 2022
MacBook Air-13 inch (M2) 2022
MacBook Pro-16 inch (M1) 2021
MacBook Pro-14 inch (M1) 2021

If the full model name does not appear, update your device to the latest system version and try again. If it still does not appear after the update, this is normal and will not affect charging performance.

When an universal device is detected,
The screen will automatically show the charging interface.

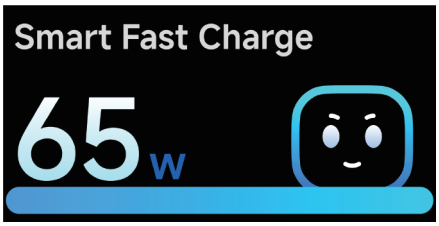

Real-time temperature monitoring

Low-temperature operation
Tap to view

Intelligent temperature control
Tap to view